




Made in Germany

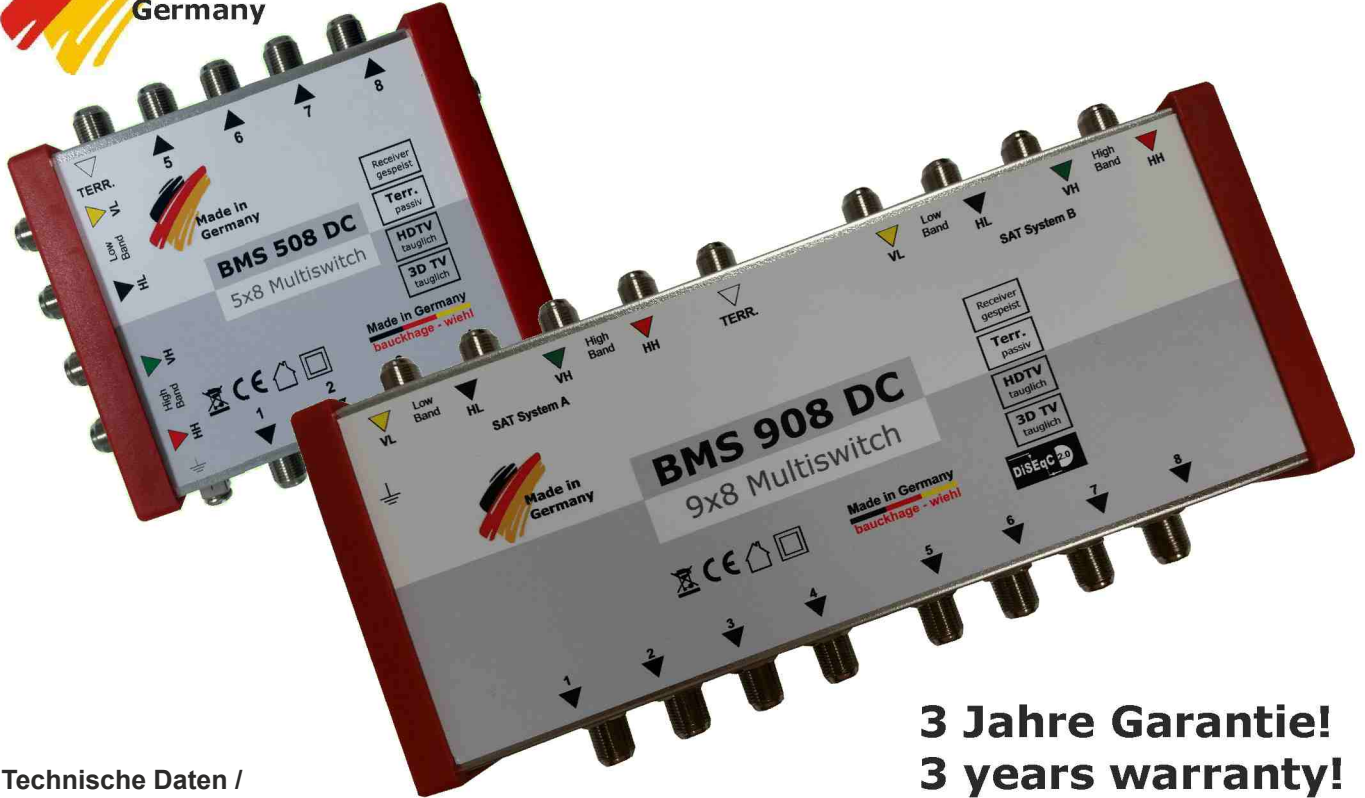

3 Jahre Garantie!
3 years warranty!

Technische Daten /
technical data

Modell	BMS 508 DC	BMS 908 DC
Art.Nr.	V14	V18
EAN	4260110722810	4260110722827
Eingänge / Inputs	4 x 950 – 2400 MHz 1 x 5 – 862 MHz (passive)	8 x 950 – 2400 MHz 1 x 5 – 862 MHz (passive)
Ausgänge / Outputs	8	8
Umschaltkriterien / Input selections	14 V / 18 V ; 0 Hz / 22 kHz	14 V / 18 V ; 0 Hz / 22 kHz ; DiSEqC 2.0
Dämpfung / Tap loss SAT	-2... +3 dB +/- 2 dB	-4... +2 dB +/- 2 dB
Dämpfung / Tap loss TERR.	-12 dB +/- 3 dB	-15 dB +/- 3 dB
Entkopplung / Isolation H/V	> 30 dB	> 30 dB
Entkopplung / Isolation SAT/TERR.	> 30 dB	> 30 dB
Ausgangspegel / Output Level	max. 101 dBµV	max. 101 dBµV
Stromaufnahme Ausgänge / Consumption outputs	< 27 mA (Receiver)	< 56 mA (Receiver)
Quad LNB tauglich / Quad LNB suitable	nein / no	nein / no
Netzteil-Anschluss / DC connector type	2,1 mm Buchse / 2,1 mm jack	2,1 mm Buchse / 2,1 mm jack
Netzteil / Power supply unit	optional, 18V ... 20V	optional, 18V ... 20V
Betriebstemperatur / Temperature	- 20° C ... + 70° C	- 20° C ... + 70° C
Abmessungen / Dimensions	130 x 110 x 54 mm	240 x 110 x 54 mm
Gewicht / Weight	280 g	490 g

Multischalter / Receiver gespeist **Made in Germany**
Multiswitch / Receiver powered **bauckhage - wiehl**